

Wheelchair mounting

Thank you for using our virtual mounting service!

Please send this information to: vmsteam@rehadapt.com

virtual mounting service	е	Please send this info	ormation	ı to: <u>vmsteam@r</u>	rehado	<u>apt.com</u>	
Organization Rehadapt			reseller	eseller			
Contact name	Client's nan	Client's name/alias					
Street		Characteristics					
ZIP/City							
State/Country The client w				eighs over 25 kg (55 lbs) 🗌			
Wheelchair			A	AC Device	•		
General information Primary		Secondary (opt.)	Мо	Manufacturer / model			
manufacturer / model	,	, , , ,					
has a laptray	as a laptray		Ad	Adapter plate needed			
has tilting / reclining function			Ac	Access methods used			
has adjustable height/drives up				Touch		Eye tracking	
with standing function				Mouse		Switch	
has adjustable armrests							
is foldable for transport			I —	Options			
other function				add phone holder			
Mount options			-				
	Left Left	Left T	Oth	other			
mounting side	Len	Right Right					
		Agric Agric	S	witch / Jo	vsti	ck	
add decoupling feature at the wheelchair base (base coupler)			Manufacturer/Model				
wheelchair base (base coupler)							
adjustable 3D joint							
(standard)			mo	ounting side	Le		
						Right	
joint type fold down joint			<u>-</u>	Options			
<i>A</i>		- 11 - 2005;		x back tubes			
swing away joint	п			add decoupling feature at the			
Swing away joint	U			eelchair base			
			_				
Pictures							
whole angular whole	e front	label	е	levated		tilted	
(incl. device position)	9			B		- A	
				-			
					5		
		MXXVII PA	(W) (2000	(
d b	£						

side details

whole side

(incl. device position)

seat underneath



armrest

Please read carefully the hints below for folling out the form. For any questions or clarifications send us an e-mail vmsteam@rehadapt.com or visit www.rehadapt.com/how-to-vms for more hints.

General note

We try to keep the process short and simple, but our virtual solution is based on the information you provide us with. This is why we kindly ask you to be accurate and thorough when requesting a VMS. Otherwise, our output might not match your needs.


Taking photos

Please take clear photos from different perspectives for a full overview (examples on first page). Include pictures of the different positions used by the user (e.ag. standing, tilting, armrest folded). Avoid generic pictures or pictures from the wheelchair manufacturer's website. Keep a yardstick or another dimensional reference in each picture. Hold your device

or a dummy like a sheet of paper at the desired position. Orientate all photos correctly and send them as individual JPEG files or in a single ZIP file together with the filled out form.



The M3D Base Coupler lets you remove the entire mount directly at the wheelchair frame with a quick release mechanism.

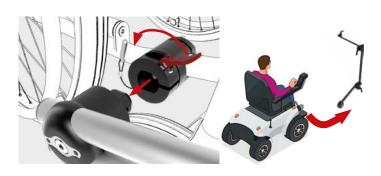

A precise alignment is achieved through a racetrack-shaped connection. An eccentric lever and a locking pin ensure maximum safety. Important: adds a 38mm of set (1.5").

Do you think your client could profit more from their devices with additional mount-

ing solutions like a **floorstand** in their living

room or a table stand at school? Learn



Joint types

For the upper joint there are three options to choose from:



3D joints are the most versatile joints and provide full 360° adjustment in all dimensions. Comes with a swivel unit.









Additional mounts



more about a holistic view on your client's needs and full mounting assessments! Ensuring independent communication for **each stage of the day** is our mission. More at rehadapt.com/360-degrees-of-mounting





Folding joints move a device up and then to the side for a quick exit option without detaching the mount. Comes with a swivel unit.







Swing away joints swing the horizontal tube and the device away with the push of a button.







Table mounts



Floorstands

Your comments: