


CL-414


Luminaire



Details

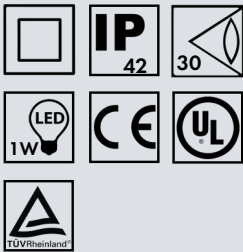


Schematic

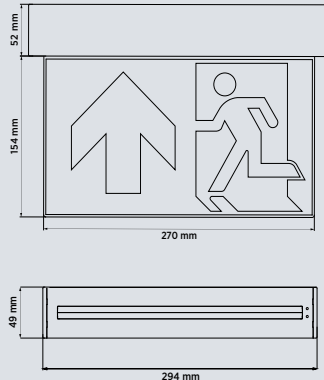

Type	Exit sign luminaire
Mounting	Ceiling, sidewall, flag, suspended
Light source	50.000h operational time, 6000K color temperature
Warranty	1-years repair warranty
Dimensions	294mm x 206mm x 49mm
Housing color and material	White plastic
Cable connection	Max. 2.5mm ² cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained / Maintained
Constant nominal ambient temperature range	0 °C < T _a < 45 °C

High-quality double sided LED exit sign. It was designed mainly for buildings with high aesthetic requirements (hotels, business centres). The CL-414 luminaire suitable for types of mounting: to the ceiling, parallel to the sidewall and perpendicularly to the sidewall.

The following pictograms can be selected:

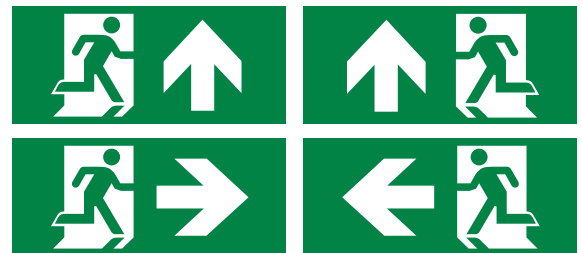

Product name	System type	Main supply	Input current	Battery type/time	Product code
CL-414 Slave/Con/MB	Conventional main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	300261
CL-414 Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	15mA	-	300190
CL-414 Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	15mA	-	300153
CL-414 Slave/Con/CB/24V	CL-24V CON CB	DC 24-32V	80mA	-	300320
CL-414 Slave/MB	CL-100 - 400	AC 120-240V	32mA	NIMH 600mA 1-3 h	300262
CL-414 Slave/RF/MB	CL-100 RF	AC 120-240V	32mA	NIMH 600mA 1-3 h	-
CL-414 Slave/CB 24V	CL-24V CB	DC 24-32V	80mA	-	300272
CL-414 Slave/CB	CL-600	AC 120-240V	15mA	-	300146
CL-414 Slave/CB AC-DC	CBS-230 AC/DC	AC/DC 120-240V	15mA	-	-